

Code: PCX/AM078-L0/AM

ALARM CONTROL PANEL **PCX/AM078-L0/AM** PYRONIX

Net: **199.66 EUR** Gross: **199.66 EUR**

The PCX/AM078-L0/AM alarm control panel is intended for security of small and medium-sized facilities, offering comprehensive functionality in the field of security systems.



SPECIFICATION


Mainboard inputs:	8 pcs
Mainboard outputs:	15 pcs
Maximal number of supported inputs:	78 pcs
Maximal number of supported outputs:	85 pcs
Users + admins:	100
Partitions:	—
Zones:	8
Events memory:	1250
Timers:	—
Supported keypads:	8 pcs (6 pcs wire)
Access from PC:	• RS-232 • PyronixCloud (PCX Insite application)
Mobile phones support:	• Android: Free application HomeControl+ • iOS: Free application HomeControl+ • Remote control of the control panel via SMS
Keyboard included:	—
Enclosure included:	✓
Protection class (Grade):	2
Power supply:	230 V AC

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation temp:	-10 °C ... 40 °C
Weight:	5.3 kg (with enclosure and accessories)
Dimensions:	317 x 395 x 101 mm
Supported languages:	English
Manufacturer / Brand:	PYRONIX
SAP Code:	361301736
Guarantee:	2 years

PRESENTATION

Internal view of the housing:

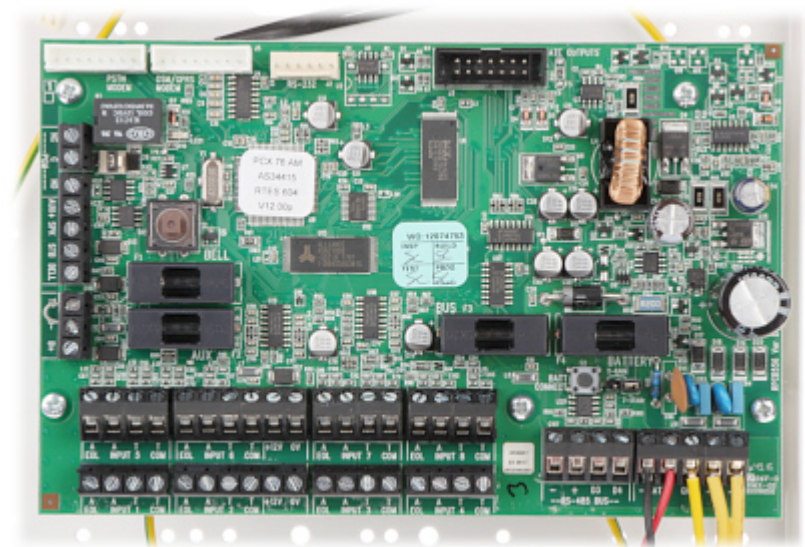

Mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60