


Code: AFP-0160/18

## ANTENNA AMPLIFIER **AFP-0160/18** 18 dB

Net: **13.02 EUR** Gross: **13.02 EUR**

Amplifier is designed to power from a few to several antenna outlets. It is mounted in metal box with "F" type connector outputs. Gain parameter value is given for 800 MHz.

The enclosure and fastening tie (included) are made from plastic resistant to UV radiation.

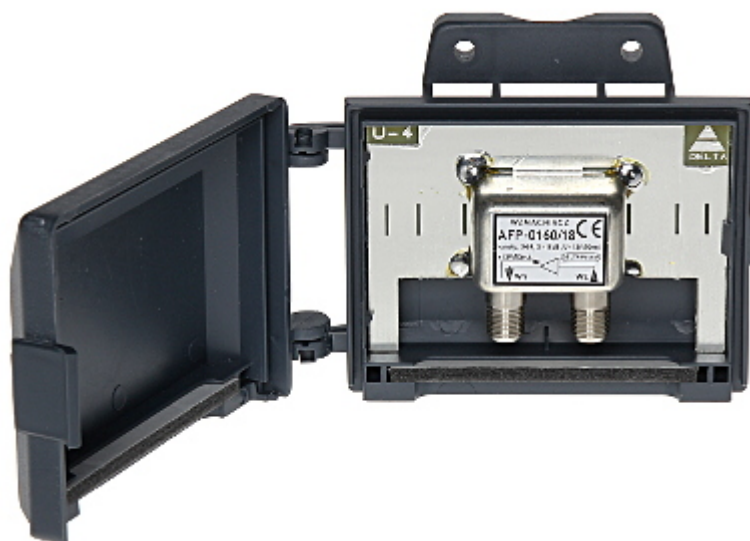

### SPECIFICATION


|                           |                                |
|---------------------------|--------------------------------|
| Channels:                 | 3 - 69                         |
| Frequency range:          | 76 MHz ... 860 MHz             |
| Gain :                    | 18 dB                          |
| Number of inputs/outputs: | 1 / 1                          |
| IMA3 60dB:                | 88 dBμV                        |
| Amplifier shield:         | ✓                              |
| Input/output impedance:   | 75 Ω                           |
| Connectors type:          | "F"                            |
| Housing:                  | Plastic                        |
| Mounting:                 | on a mast or a wall            |
| Power supply:             | 12 V / 50 mA via antenna cable |
| Manufacturer / Brand:     | DELTA                          |
| Guarantee:                | <b>3 years</b>                 |

### PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Connectors:

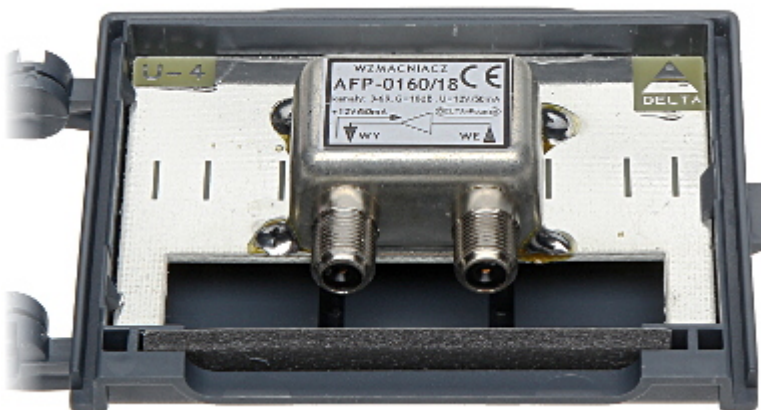

Housing:

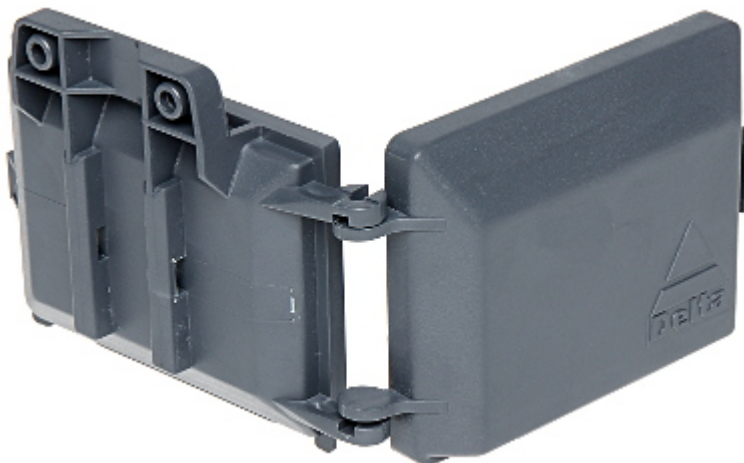

Method of mounting:



In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|