

Code: ARA-104

ANTENNA AMPLIFIER **ARA-104** 8 / 12 dB

Net: **15.72 EUR** Gross: **15.72 EUR**

The ARA-104 is used to TV signal distribution in home antennas installations. Two-stage, low noise, distribution amplifier, allows to connect 4 TV sets to the antenna installation or cable network. Amplifier can be powered directly from included power adapter or via output with using a separator.



SPECIFICATION


Frequency range:	87 MHz ... 774 MHz
Number of inputs/outputs:	1 / 4
Input/output impedance:	75 Ω
Connectors type:	"F"
Gain :	8 / 12 dB
Gain adjustment:	—
S/N ratio:	≤ 4 dB
Maximum output level:	98 dB μ V
IMA3 60dB:	92 dB μ V
IMA2 60dB:	79 dB μ V
Return loss:	≥ 10 dB
Pre-amplifiers powering:	—
Operation temp:	-25 $^{\circ}$ C ... 55 $^{\circ}$ C
Power supply:	12 V DC / 65 mA
Weight:	0.1 kg
Dimensions:	112 x 64 x 29 mm
Manufacturer / Brand:	AMS
Guarantee:	2 years

PRESENTATION


Connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

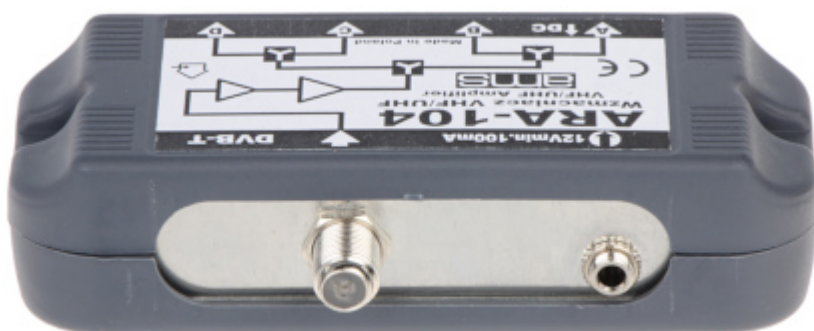

Top view:

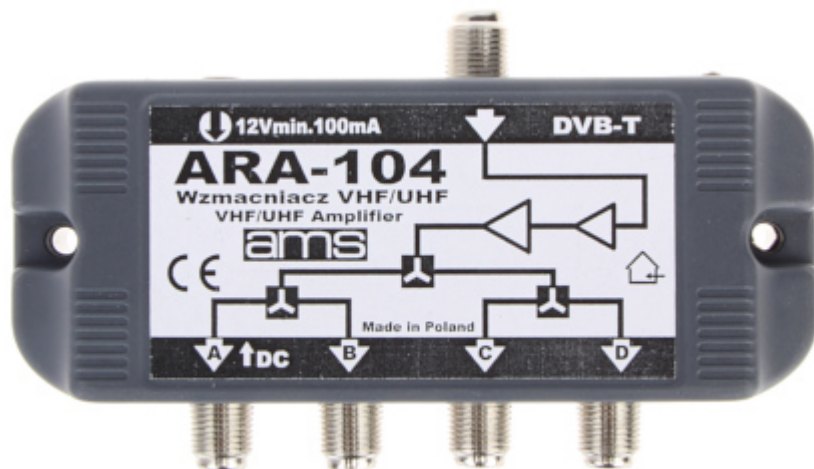

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------