


Code: AWS-1036

ANTENNA AMPLIFIER **AWS-1036** AMS

Net: **33.53 EUR** Gross: **33.53 EUR**

The AWS-1036 is designed to amplify and split a TV signal to 4 home antenna systems based on use band antennas connected by multiplexer. Gain adjustment allows to set the right level of signal in whole installation.

Amplifier can be powered directly from included power adapter or via output with using a separator.

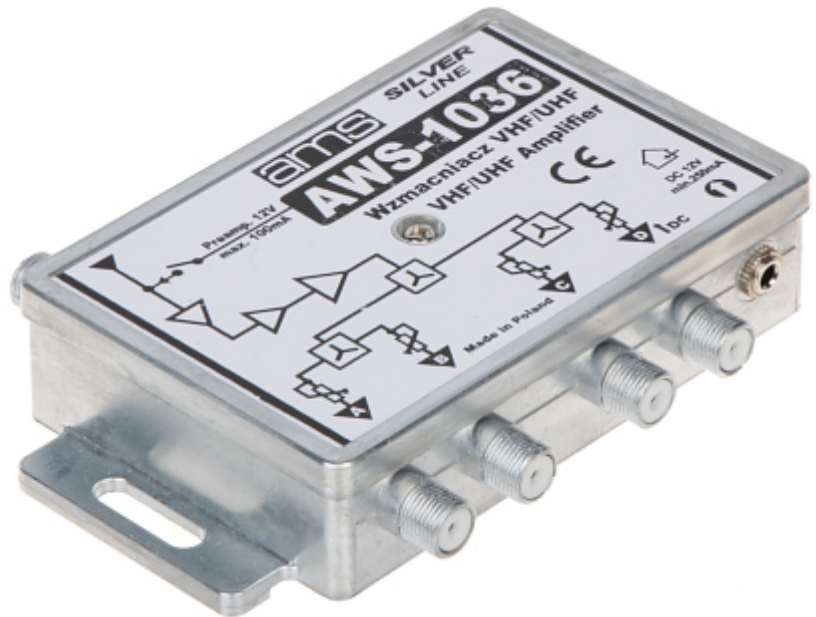



SPECIFICATION

Frequency range:	87 MHz ... 790 MHz
Number of inputs/outputs:	1 / 4
Input/output impedance:	75 Ω
Connectors type:	"F"
Gain :	20 dB / 27 dB $\pm$ 2 dB
Gain adjustment:	0 dB ... 14 dB (+/- 1dB)
S/N ratio:	$\leq$ 5 dB $\pm$ 1 dB
Maximum output level:	102 dB μ V
IMA3 60dB:	96 dB μ V
IMA2 60dB:	83 dB μ V
Return loss:	10 dB
Operation temp:	-25 $^{\circ}$ C ... 55 $^{\circ}$ C
Power supply:	12 V DC / 250 mA
Weight:	0.3 kg
Dimensions:	124 x 88 x 27 mm
Manufacturer / Brand:	AMS
Guarantee:	2 years


PRESENTATION

Connectors:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

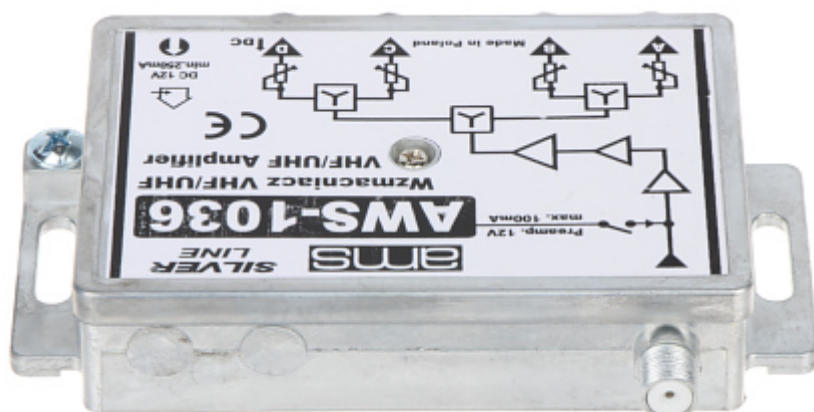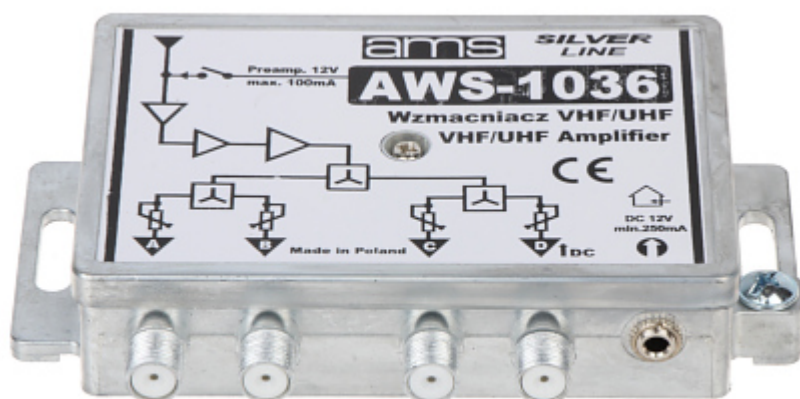

Top view:

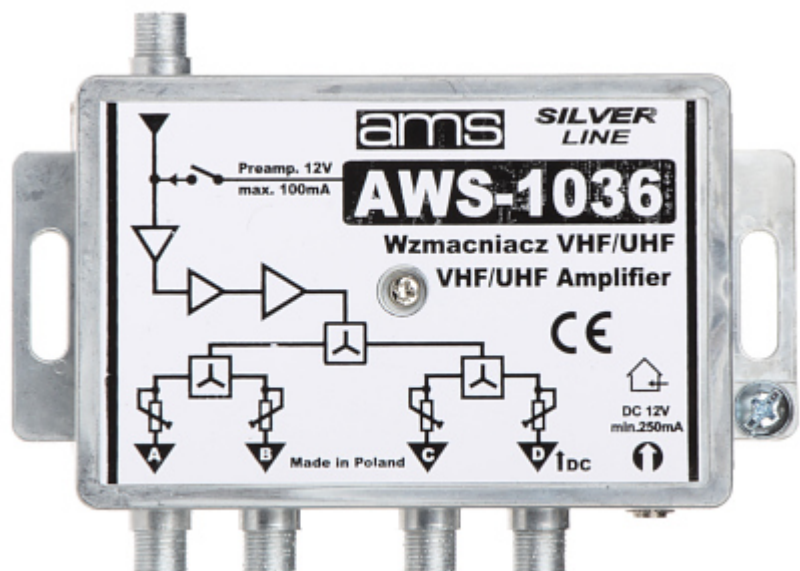

Internal view of the housing:

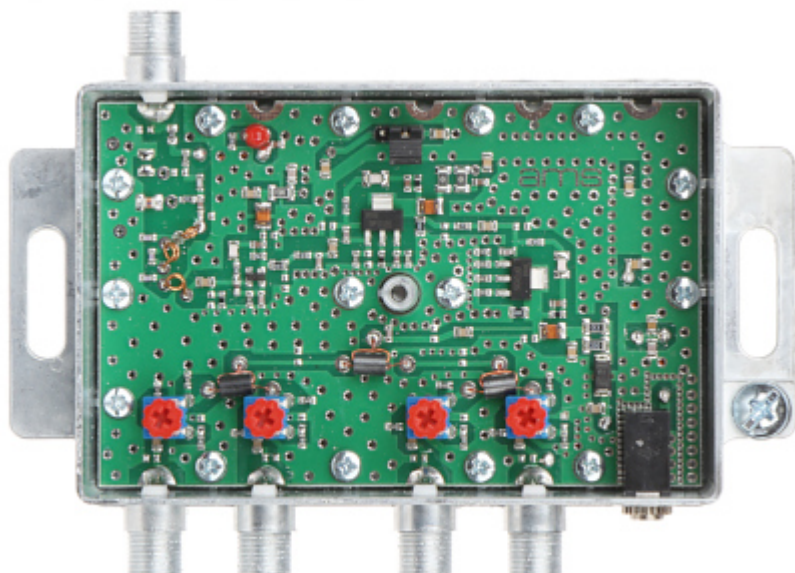

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------