


Code: PFM341-9CH

SWITCHING ADAPTER **PFM341-9CH** DAHUA

Net: **85.13 EUR** Gross: **85.13 EUR**

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is DC 12V. It allows to connect up to 9 devices. Maximal load for the one output is 2.5A, but you should remember the total load for all outputs must be lower than 5A. Each output is protected independently with glass fuse. Please pay attention for proper cooling conditions of the power adaptor during work!

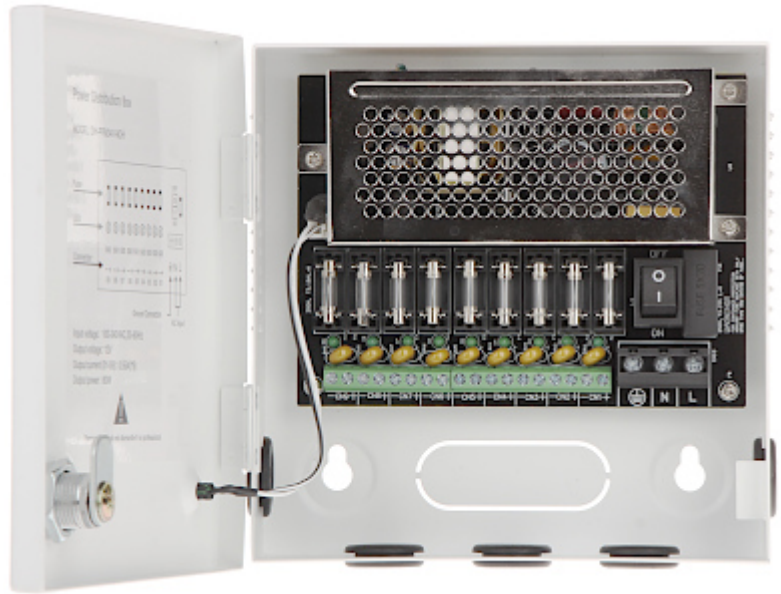

SPECIFICATION

Adapter type:	Switching
Output voltage:	12 V DC
Output voltage adjustment:	—
Max. output current (total):	5 A
Max. output current for single output:	2.5 A
Outputs protection:	3.15 A Glass Fuse
LED indication:	✓
Protection:	• Overload • Overvoltage
Input voltage:	90 ... 264 V
Power:	60 W (max)
Number of outputs:	9
Connector type:	Cable terminals
Housing type:	Metal, wall-mounted
Key closed:	✓
Operation temp. / Relative humidity:	-20 ... 45 °C / < 90 %
Weight:	0.9 kg
Dimensions:	165 x 165 x 50 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Internal view of the housing:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Power Distribution Box

MODEL: DH-PFM341-9CH

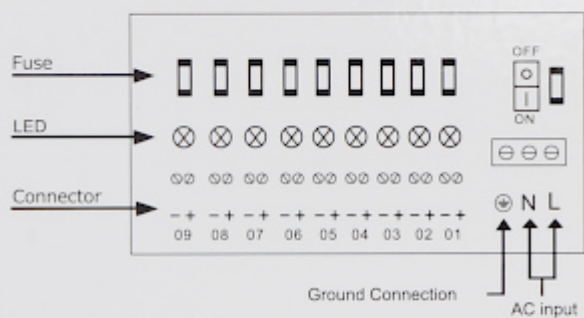

Input voltage: 100-240VAC, 50-60Hz

Output voltage: 12V

Output current (01-09): 0.55A(*9)

Output power: 60W



Warning: Please do not dismantle if no professional

Power adaptor with closed cover:



Bottom view:



Rear view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------