


Code: AWZ-511

RELAY MODULE AWZ-511

Net: 8.13 EUR Gross: 8.13 EUR

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

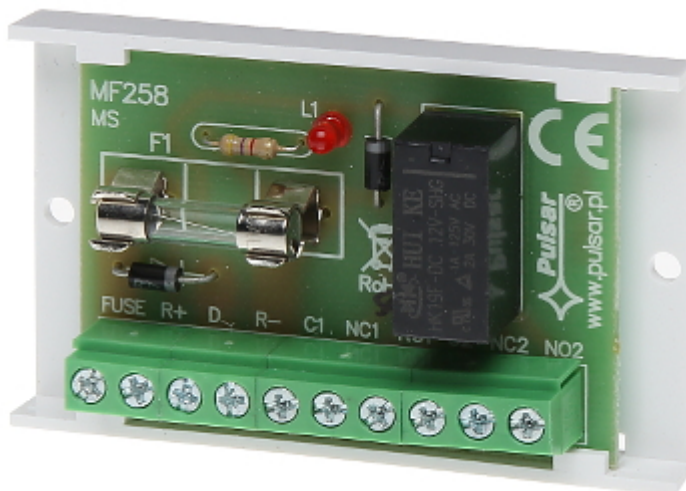


SPECIFICATION

Number of relay outputs:	2
Power supply:	10 ... 14 V DC
Current consumption:	33 mA @ 12 V DC
Relay maximal load:	2 A (max) 30 V DC / 50 V AC (max)
Output:	2 x NO/NC
Main features:	• LED indication • 5/20mm delayed fuse - 1.5 A Fuse output
Operation temp:	-10 °C ... 40 °C
Weight:	0.03 kg
Dimensions:	70 x 43 x 20 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years


PRESENTATION

Top view:

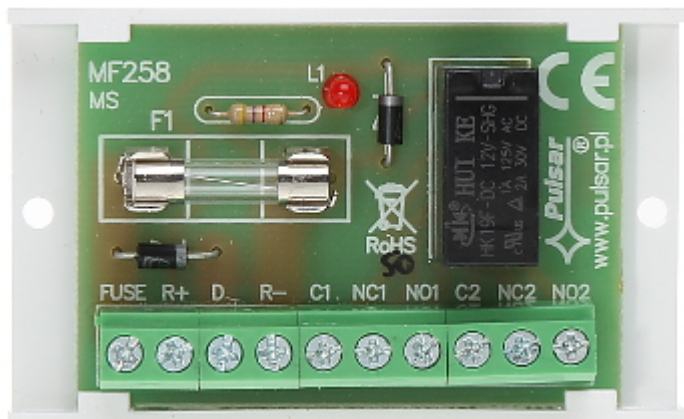

Connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

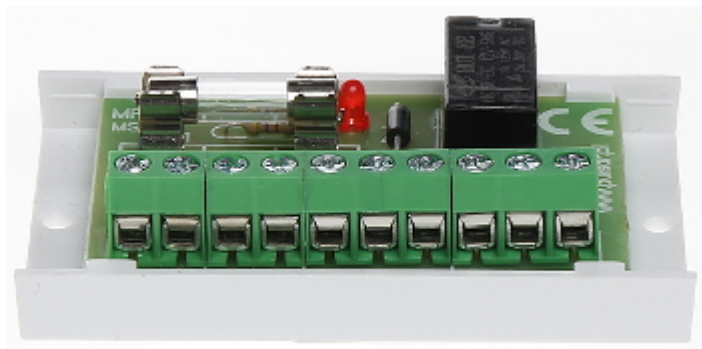

Mounting side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

