

Code: HY-SA21A-W2(868)

WIRELESS SMOKE DETECTOR **HY-SA21A-W2(868)** DAHUA

Net: **83.91 EUR** Gross: **83.91 EUR**

Wireless smoke detector, which is designed to early detection of a developing fire. Besides sending the information to the control panel, the HY-SA21A-W2(868) detector can warn of the danger of using the built sound alarm.

The HY-SA21A-W2(868) supports the other devices compatible with wireless DAHUA system.



SPECIFICATION

Support:	Wireless alarm systems DAHUA
Detection:	smoke
Alarm signaling:	• Buzzer ≥ 85 dB @ 3 m • LED indicator - red • Signal to control panel
Frequency band:	868 MHz
Radio communication range (at open area):	1000 m
Power supply:	1 x battery CR123A 3 V (included)
Backup time:	~ 3 years
Current consumption at standby mode:	≤ 35 μ A
Maximal current consumption:	≤ 35 mA
Main features:	• Smoke detection - Chamber with photoelectric sensor • Frequency hopping against jamming for reliable transmission • Alarm mute function • Bidirectional communication • AES-128 data encryption • Ceiling mounting • Tamper detection - opening the enclosure
Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.13 kg

Dimensions:	Ø 98 x 43 mm
Manufacturer / Brand:	DAHUA
Guarantee:	2 years

PRESENTATION

Front view:




Mounting side view:





Internal view of the housing:



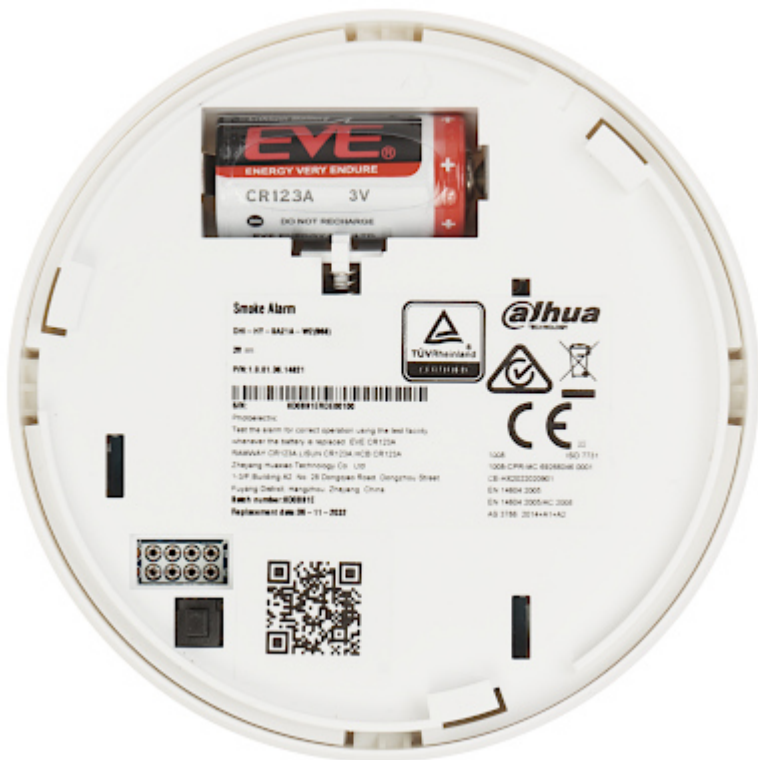

Place for batteries 1 x 3V CR123A:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

