


Code: DS-KAW50-1

SWITCHING ADAPTER **DS-KAW50-1** Hikvision

Power adapter is equipped with aesthetic, solidly made metal casing box.

The power adapter is dedicated to work with video intercoms and internal panels of the Hikvision brand.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!

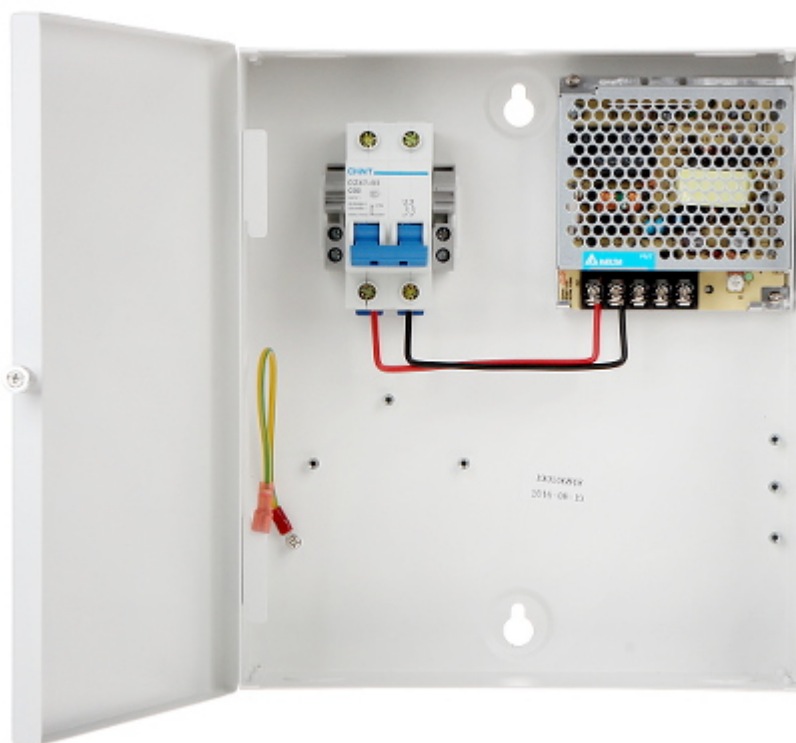

Adapter type:	Switching
Output voltage:	12 V DC
Output voltage adjustment:	11 ... 14 V DC
Max. output current (total):	4.17 A
Max. output current for single output:	4.17 A
LED indication:	✓
Input voltage:	100 V ... 240 V AC
Power:	50 W
Number of outputs:	1
Connector type:	screw terminals
Main features:	• Short-circuit protection • Overload protection • Overvoltage protection
Housing type:	Metal, wall-mounted
Weight:	1.86 kg



DATA SHEET

Dimensions:	267 x 244 x 81 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305300178
Guarantee:	3 years

