


Code: SD-904

## TV/SAT SPLITTER **SD-904** TERRA

The SD-904 splitter is used in multiswitch systems to distribute a signal from multiswitch bus. Additionally, the splitter also distributes terrestrial TV signals. The splitter is equipped with DC-transition switch that in "ON" position passes DC voltage through "H" paths to both branches. In "OFF" position it runs voltage to one path only.

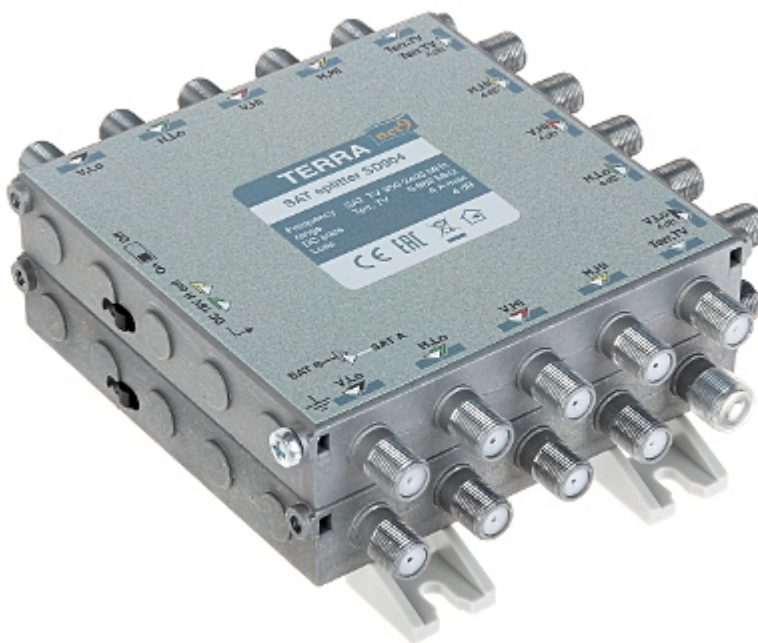

|                            |  |
|----------------------------|--|
| Number of inputs:          | 9 pcs  |
| Number of outputs:         | 18 pcs   |
| Frequency range:           | <ul style="list-style-type: none"> <li>• 950 ... 2400 MHz - SAT,</li> <li>• 5 ... 862 MHz - RTV</li> </ul> |
| Connection loss:           | 4 dB - SAT, 4 dB - RTV   |
| Isolation between outputs: | > 30 dB  |
| DC-transition:             | max. 2 A   |
| Main features:             | The die-cast metal body provides effective shielding and high mechanical resistance                        |
| Operation temp:            | -20 °C ... 50 °C   |
| Weight:                    | 0.75 kg  |
| Dimensions:                | 126 x 135 x 50 mm  |
| Manufacturer / Brand:      | TERRA  |
| Guarantee:                 | 2 years  |