


Code: R-14R

## SPLITTER **R-14R**

Active splitter with amplification adjustment.  
If antenna is without an amplifier, the device detects it automatically and does not pass the voltage to it.  
The device is perfect to installations, where length of the antenna cable from the splitter to the TV set is from several to several dozen meters (maximum 50m). Protection enclosure included in the kit enables outdoor installation, directly to the antenna mast.

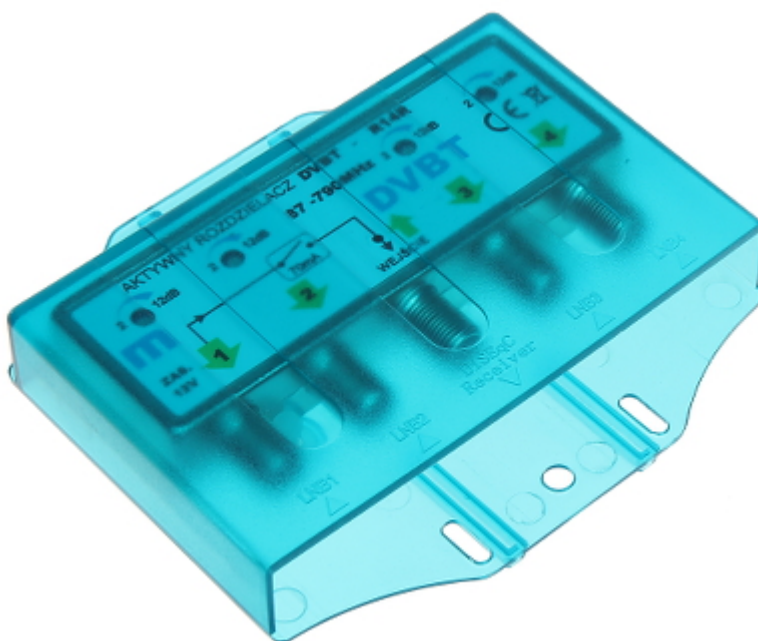

Number of inputs:	1 pcs
Number of outputs:	4 pcs
Frequency range:	87 ... 790 MHz
Gain :	4 x 2 ... 12 dB
Max. TV signal level:	88 dB $\mu$ V
Possibility to pass the DC voltage to the preamplifier:	✓
Shielding:	✓
Impedance:	75 $\Omega$
Weight:	0.108 kg
Dimensions:	103 x 93 x 20 mm
Manufacturer / Brand:	MEZON
Guarantee:	2 years