


Code: AWZ-510

## RELAY MODULE **AWZ-510**

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

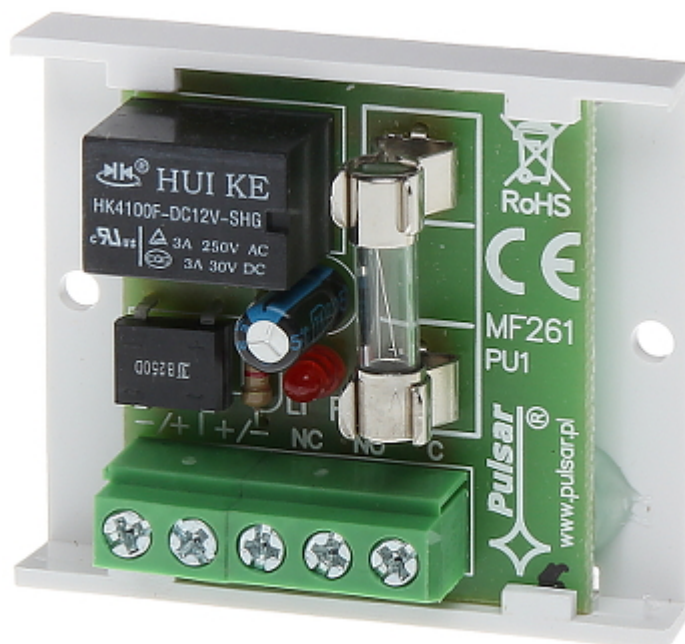

|                          |                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------|
| Number of relay outputs: | 1                                                                                             |
| Power supply:            | <ul style="list-style-type: none"> <li>• 10 ... 16 V DC,</li> <li>• 10 ... 13 V AC</li> </ul> |
| Current consumption:     | 33 mA @ 12 V DC                                                                               |
| Relay maximal load:      | 1 A (max) 30 V DC / 50 V AC (max)                                                             |
| Output:                  | 1 x NO/NC                                                                                     |
| Main features:           | LED indication                                                                                |
| Operation temp:          | -10 °C ... 40 °C                                                                              |
| Weight:                  | 0.02 kg                                                                                       |
| Dimensions:              | 50 x 43 x 20 mm                                                                               |
| Manufacturer / Brand:    | PULSAR                                                                                        |
| Guarantee:               | 2 years                                                                                       |