

Code: ATLO-KRM-103

CODE LOCK ATLO-KRM-103

Net: 374.03 SEK Gross: 374.03 SEK



Indoor, autonomous code lock with RFID reader.

Autonomous operation of the device allows the user to:

- Open by using a card or PIN code.
- Remember stored cards or PIN codes.
- Signaling left the door open.
- Acoustic and optical signaling.

Administrator capabilities are following:

- Programming by using the keypad.
- Adding a new card by using the keypad.

SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	3 ... 6 cm
Autonomous operation:	✓
Keyboard built-in:	✓
Communication:	Wiegand 26
Doorbell button:	—
Tamper output:	—
Power supply:	12 V DC $\pm$ 10%
Maximal current consumption:	25 mA (Standby mode) 60 mA (operation)
Relay contacts load:	1 A / 12 V
Main features:	• Number of relay outputs : 1, • 2000 indexed users, • Identification: Card and/or PIN • Blue backlight of the keys • Support for door contact and exit button • Electric strikes and electromagnetic locks support • Reversing bolt support • Tamper protection (detection of removing from mounting surface and enclosure opening) • Alarm output • NO/NC output • Possible connection of the external ATLO-R series reader (read in/out door control)

Operation temp:	-45 °C ... 60 °C
Permissible relative humidity:	10 ... 90 % (non-condensing)
"Index of Protection":	IP40
Housing:	Self-extinguishing ABS
Color:	White
Weight:	0.09 kg
Dimensions:	72 x 96 x 21 mm
Manufacturer / Brand:	ATLO
Guarantee:	3 years


PRESENTATION

Front panel view:



Internal view of the housing:




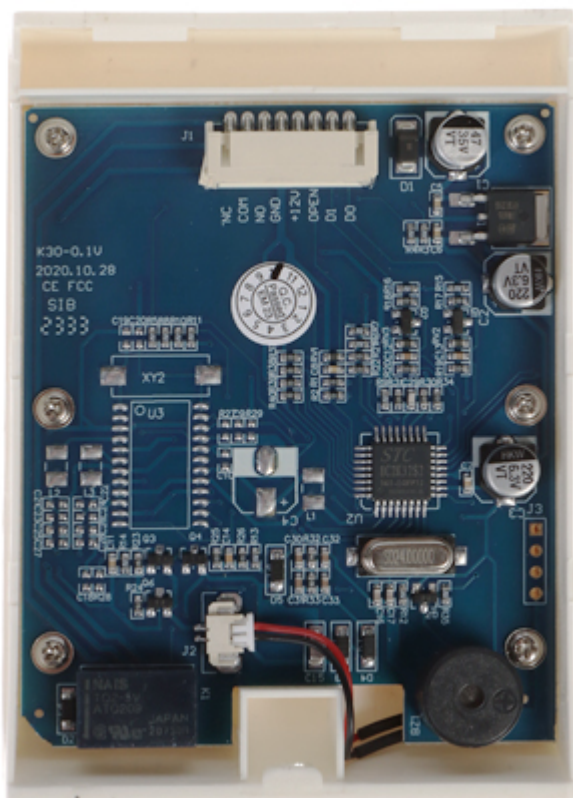

Mounting side view:



In the kit:

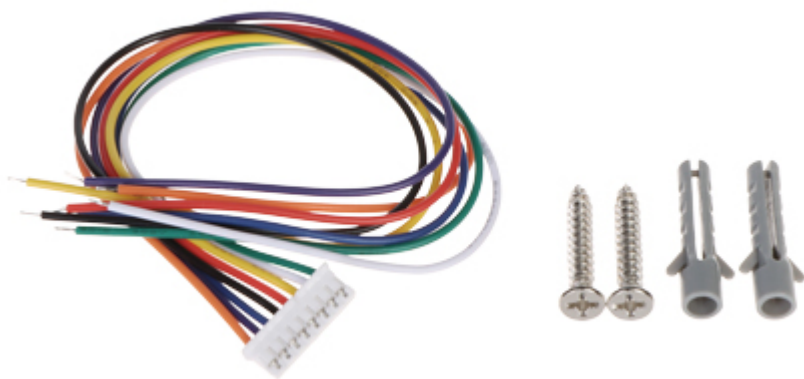

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------