

Code: DG-65/PLUS

PIR DETECTOR **DG-65/PLUS** PARADOX

Net: **29.89 EUR** Gross: **29.89 EUR**

The DG-65/PLUS passive PIR detector designed to use indoors. The advanced signal analysis algorithms ensure stable operation and low level of false alarms.



SPECIFICATION

Application:	Indoor
Pyroelectric sensor:	quadruple
Sensor type:	Passive Infra Red (PIR)
Range:	12 x 12 m
Detection angle:	110 °
Recommended installation height:	2.1 ... 2.7 m
Sensitivity adjustment:	—
Autodiagnostics:	—
Pet immunity:	—
Prealarm feature:	✓
Maximal outputs load:	28 V DC / 100 mA
Alarm outputs:	NC
Alarm time:	3 s
Target speed range:	0.2 ... 3.5 m/s
Digital temperature compensation:	✓
Power supply:	9 ... 16 V DC
Maximal current consumption:	15 mA

Main features:	• Interchangeable Fresnel lenses • Tamper protections • Interlock Sensor Geometry (ISG) Technology • Patented detection analyzing (without signal analog processing) • Auto Pulse Signal Processing • Digital Shield algorithm reducing the number of false alarms • Metal shield protecting from EMI, RFI signals • Test mode • EN 50131 • II Protection Class
Environment class:	class I
Operation temp:	-20 °C ... 50 °C
Color:	White
Weight:	0.096 kg
Dimensions:	74 x 101 x 56 mm
Country of origin:	Canada
Manufacturer / Brand:	PARADOX
Guarantee:	2 years

PRESENTATION


Side view:




Internal view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

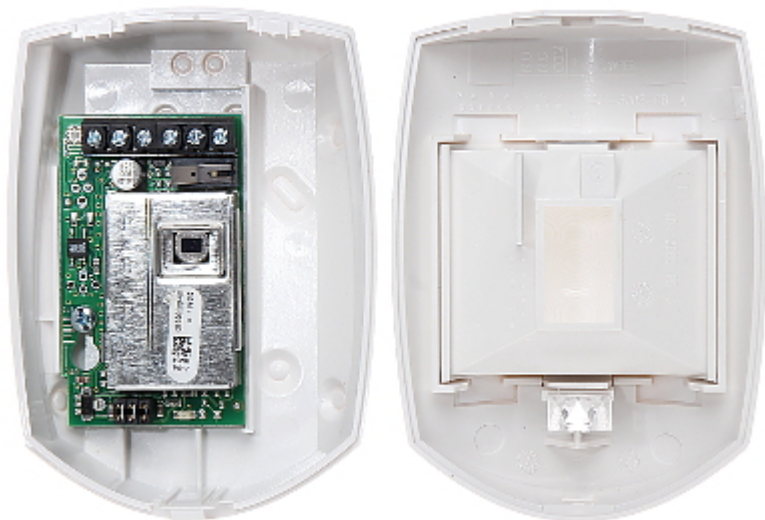

Detector range:

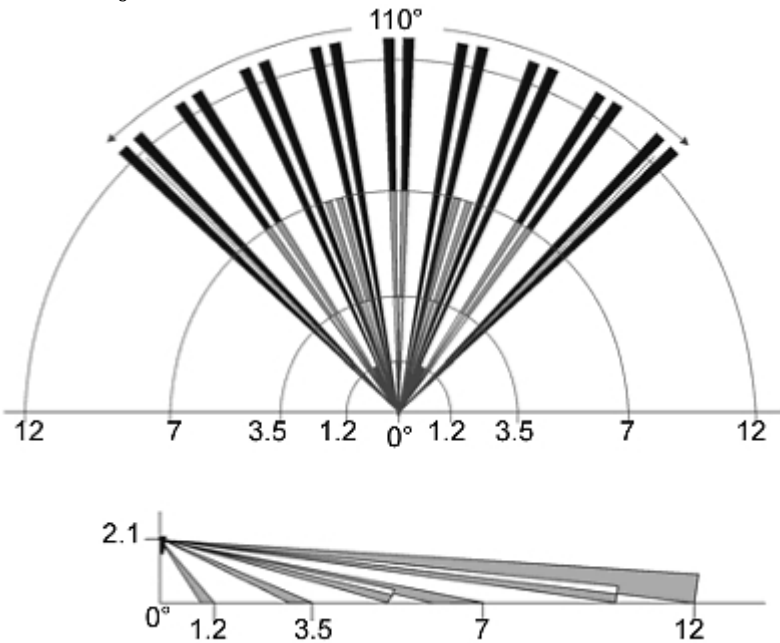

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

