


Code: SW-9108

MultiBAS **SW-9108** ProfiSETT TELMOR

Net: **167.67 EUR** Gross: **167.67 EUR**

The MultiBAS devices from TELKOM-TELMOR are a combination of an amplifier and a multiswitch.

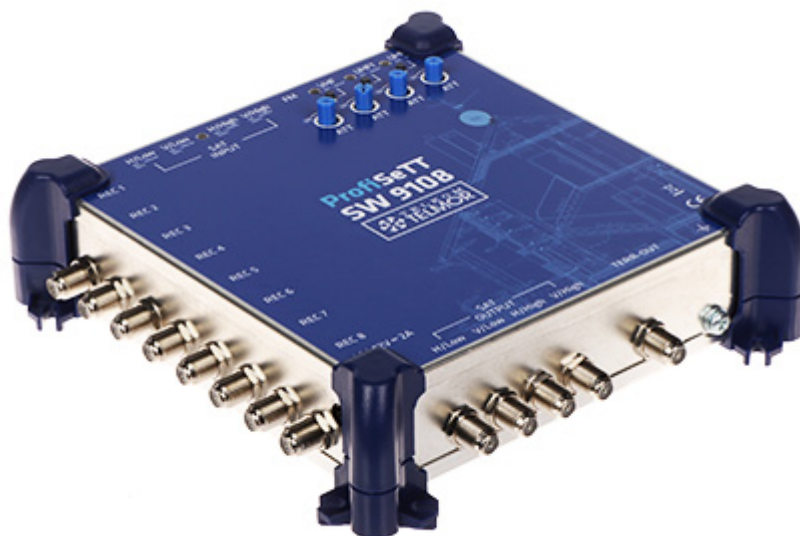


SPECIFICATION

Frequency range:	• 87 MHz ... 112 MHz - FM, • 170 MHz ... 240 MHz - VHF / DAB, • 470 MHz ... 694 MHz - UHF1, UHF2 • 950 MHz ... 2150 MHz - SAT
Gain :	• 15 dB @ FM • 15 dB @ VHF / DAB • 25 dB @ UHF1, UHF2 • -2 dB ... 6 dB @ SAT
Inputs:	8 pcs
Outputs:	• 8 pcs • 5 pcs (Loop through)
Pre-amplifiers powering:	12 V DC : 50 mA / VHF/DAB, UHF1, UHF2 input
Gain adjustment:	-20 dB ... 0 dB (for single line)
Maximal output level DIN45004B:	> 95 dBμV - FM > 95 dBμV - VHF > 95 dBμV - UHF1, UHF2 > 94 dBμV - SAT
Return loss:	> 10 dB
S/N ratio:	< 17 dB - FM < 10 dB - VHF < 12 dB - UHF1, UHF2
Main features:	• ProfiSETT product series • DVB-T, DVB-T2, DAB, DAB+ compliance • Dual UHF input for installations requiring signal reception from different directions • 5G Protected Technology • Continuous gain adjustment • High isolation between inputs : > 20 dB • Gain adjustment • High level of shielding
Power supply:	12 V DC / 2 A (power adapter included)

Power consumption:	24 W (max)
Operation temp:	0 °C ... 50 °C
Weight:	0.63 kg
Dimensions:	192 x 185 x 50 mm
Manufacturer / Brand:	TELMOR
Guarantee:	2 years


PRESENTATION

Top view:

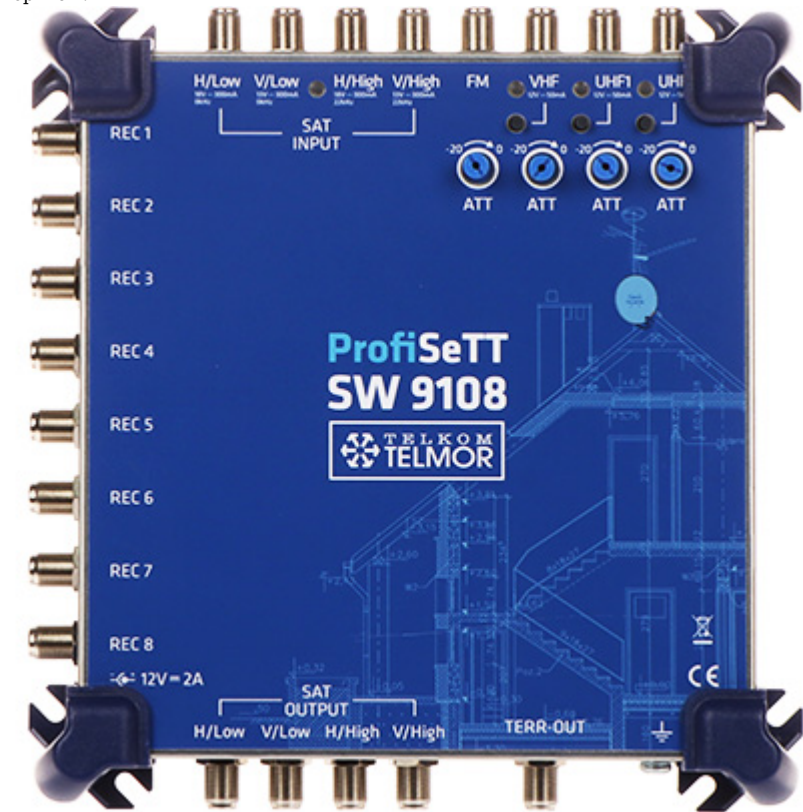

Connectors:



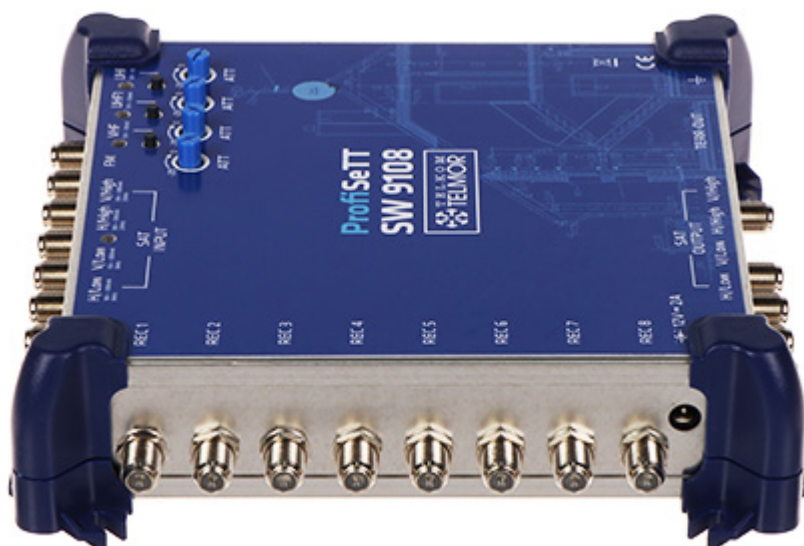

In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

