

Code: WS-6975

DVB-T/DVB-T2 SIGNAL METER **WS-6975**

Net: **141.24 EUR** Gross: **141.24 EUR**

The WS-6975 allows to measure the TV signals at DVB-T, DVB-T2 installations. Readable menu will help the operation for any installer.



SPECIFICATION

Output and input:	• 1 pcs HDMI output • 1 pcs IEC socket • 1 pcs USB • 2 pcs Jack 3.5 mm socket (TRRS) - AV input / AV output
Frequency range:	48 MHz ... 862 MHz
Signal level:	-79.5 ... -35 dBm
Antenna powering:	5 / 12 / 24 V DC / 100 mA (max)
Modulation:	QPSK / 16-QAM / 64-QAM / 256-QAM
Video signal test:	✓
Programming and firmware upgrade:	via USB port
Battery power supply:	• Li-Ion battery 7.4 V / 3000 mAh • 12 V / 1500 mA (power adapter included)
Main features:	• Analysis of the spectrum for the whole frequency band • Color LCD 3.4 ", 480 x 272 px - Possibility to view TV channels + Audio • Multimedia playback from USB memory • HDMI 1.3a • High measurement accuracy • Measurement of signal strength and quality • Power measurement : dBm, dBmV, dBμV • Measurement of C/N, S/N, BER • The set includes a practical case • Estimated battery operation time ~ 2 h
Weight:	0.5 kg
Dimensions:	178 x 104 x 52 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Supported languages:	Polish, English, Czech, Danish, Finnish, Greek, Spanish, Dutch, Indonesian (Bahasa), German, Portuguese, Russian, Swedish, Turkish, Italian
Manufacturer / Brand:	Digitsat
Guarantee:	2 years

PRESENTATION



Side view:



Bottom view:



Top view:





Battery:





In the kit:




Device is secured by handy case:



Example captures of device interface:

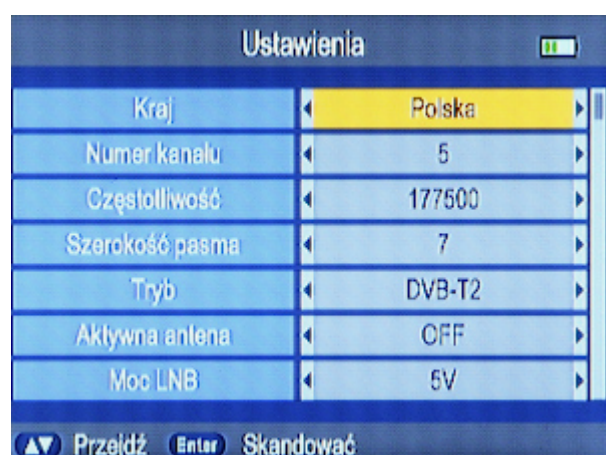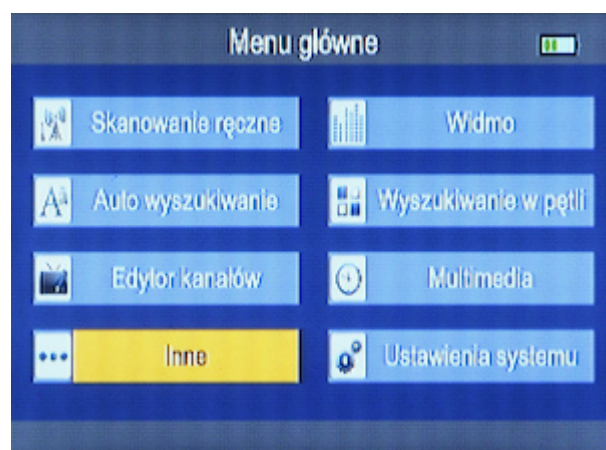

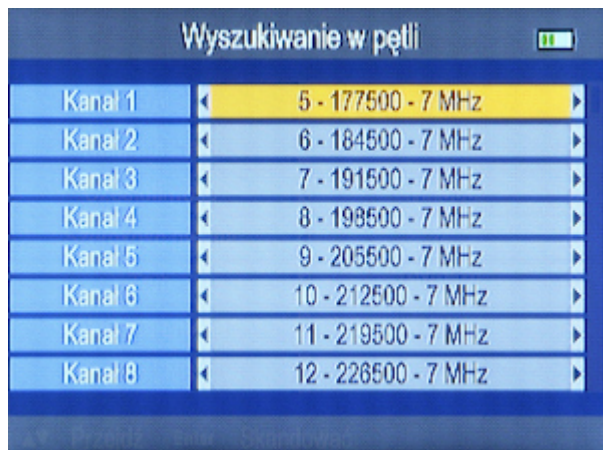

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------