

Code: HDMI-EX-120-4K-V4

EXTENDER HDMI-EX-120-4K-V4

Net: 2 056.44 NOK Gross: 2 056.44 NOK

Device allows to send High Definition signal to the TV-Set receiver equipped with HDMI connector via UTP Cat. 5, 5e, 6 cable.

HDMI-EX-120-4K-V4 is perfect solution to connect the TV-SAT receiver, DVD player, computer or game-console to the TV-set/monitor for a long distance. To TV set you need connect only one UTP cable, what makes installation easy and improve aesthetic quality of installation.



SPECIFICATION

Supported HDMI standard:	1.4
HDCP:	1.4
Protocols:	HDbitT
Supported HDMI resolutions:	• 480i @ 60Hz, • 480p @ 60Hz, • 576i @ 50Hz, • 576p @ 50Hz, • 720p @ 50/60Hz, • 1080i @ 50/60Hz, • 1080p @ 50/60Hz, • 4K UHD @ 24/25/30Hz
Maximal transmission range:	• 80 m UTP cat. 5 • 100 m UTP cat. 5e • 120 m UTP cat. 6
Main features:	• IR carrier frequency : 20 kHz ... 60 kHz • Protections : lightning, Overvoltage, ESD
Power supply:	5 V DC / 2 A (2 pcs of power supply adapters included)
Current consumption:	• 4 W Receiver • 6 W Transmitter
Operation temp:	0 °C ... 60 °C
Transmitter and receiver weight:	0.33 kg
Dimensions:	113 x 95 x 24 mm
Guarantee:	2 years

PRESENTATION

Transmitter and receiver connectors:




Transmitter and receiver connectors:




Examples of connection diagrams:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

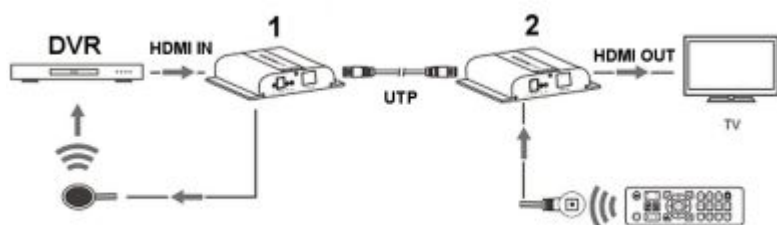

1. Transmitter
2. Receiver

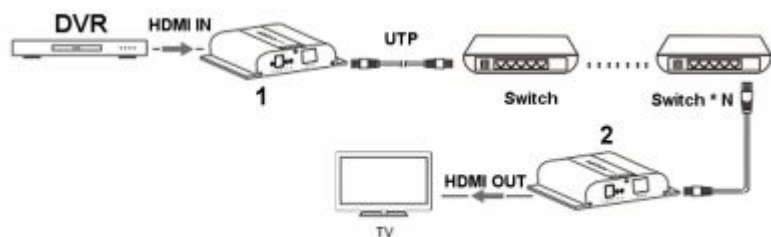

1. Transmitter
2. Receiver

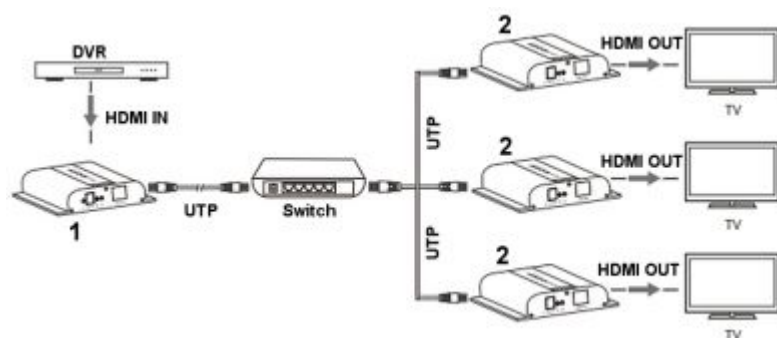

1. Transmitter
 2. Receiver
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------