

Code: S562A

VIDEO DOORPHONE **S562A** VIDOS

Net: **2 507.04 SEK** Gross: **2 507.04 SEK**

Video Doorphone is mounted in a flush-mounted housing. Surface mounting is possible with the D561B cover. Built-in RFID reader allows to control the electric strike using key fobs, proximity cards and tags functioning in the Unique EM 125kHz standard. The S562A is designed to cooperation with video doorphones and panels working in analog VIDOS system.



SPECIFICATION

Compatibility:	VIDOS Analog Video Doorphones
Sensor:	1/3 " 600 TVL
View angle:	87 °
IR illuminator:	✓
LED illuminator:	—
proximity reader built-in:	Standard - Unique EM 125kHz
Fingerprint reader built-in:	—
Built-in keypad:	—
The number of subscribers served:	2
Video output:	compatible with VIDOS analog video door-phone system
Main features:	• The kit includes a MASTER card that allows you to add user cards yourself • Number of supported proximity cards : max. 1000 • Adjustment of the opening time of the electric strike: 1s ... 99s • Electric strikes and electromagnetic locks support • Output for the additional lock release button • Vandal-proof front panel • Illuminated buttons and signboard for the surname
Power supply:	12 V DC ... 15 V DC
Power consumption:	≤ 1.5 W (operation)
Housing:	Acid-proof steel / Plastic, Waterproof

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Color:	Silver
"Index of Protection":	IP65
Operation temp:	-20 °C ... 55 °C
Weight:	0.88 kg
Dimensions:	250 x 120 x 51 mm
Manufacturer / Brand:	VIDOS
Guarantee:	3 years

PRESENTATION

Front panel:



Side view:



Rear view:




Internal view of the housing:



Connectors:



In the kit:

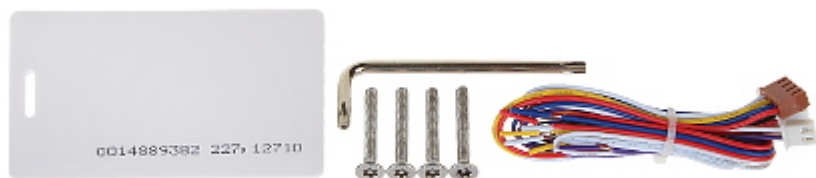

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

