

IP CAMERA TC-C34XP SPEC:W/E/Y/2.8MM/V4.0 Color Maker - 4 Mpx 2.8 mm TIANDY

Net: 4 774.77 CZK Gross: 4 774.77 CZK



PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

Attention! Enabling the ONVIF protocol in the camera disables P2P access.

SPECIFICATION

Standard:	IP
Resolution:	2592 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Sensor:	1/2.8 " Progressive Scan CMOS
Lens:	2.8 mm
View angle:	<ul style="list-style-type: none"> • 100 ° (manufacturer data) • 91 ° (our tests result)
White light LED illuminator range:	15 m
Memory card slot:	Micro SD card support up to 512GB
Image compression method:	S+265 / H.265 / H.264
Alarm inputs / outputs:	—
Audio:	<ul style="list-style-type: none"> • Microphone built-in • Audio transmission via network
Main stream frame rate:	25 fps @ 4 Mpx
Interface:	10/100 Base-TX (RJ-45)
WEB Server:	Built-in

Max. number of on-line users:	2
ONVIF:	✓
Mobile phones support:	Port no.: 3000 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application EasyLive Plus • iOS (iPhone): Free application EasyLive Plus
Access from PC:	Port no.: 3000 or access by a cloud (P2P) - PC: Free application Easy7 Smart Client Express
Default IP address:	DHCP or 192.168.1.2
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 443, 3000, 3001, 3002, 23002
Mobile client access ports:	3000, 3001
PC client access ports:	3000, 3001
Port ONVIF:	80
Intelligent image analysis:	<ul style="list-style-type: none"> • crossing the line (tripwire) • intrusion
Main features:	<ul style="list-style-type: none"> • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • ROI - improve the quality of selected parts of image • BLC/HLC - Back Light / High Light Compensation • ICR - Movable InfraRed filter • Day/night mode • Motion Detection • Privacy zones
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V / 590 mA
Power consumption:	≤ 7 W
Housing:	Dome - Metal + Plastic
Color:	White
"Index of Protection":	IP66
Mechanical protection class:	—
Operation temp:	-40 °C ... 65 °C
Weight:	0.33 kg
Dimensions:	Ø 117 x 96 mm
Supported languages:	Polish, English, Albanian, Arabic, Spanish, Korean, French, Dutch, Hebrew, German, Portuguese, Russian, Thai, Turkish, Ukrainian, Vietnamese, Italian
Manufacturer / Brand:	TIANDY
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Side view:



Mounting side view:



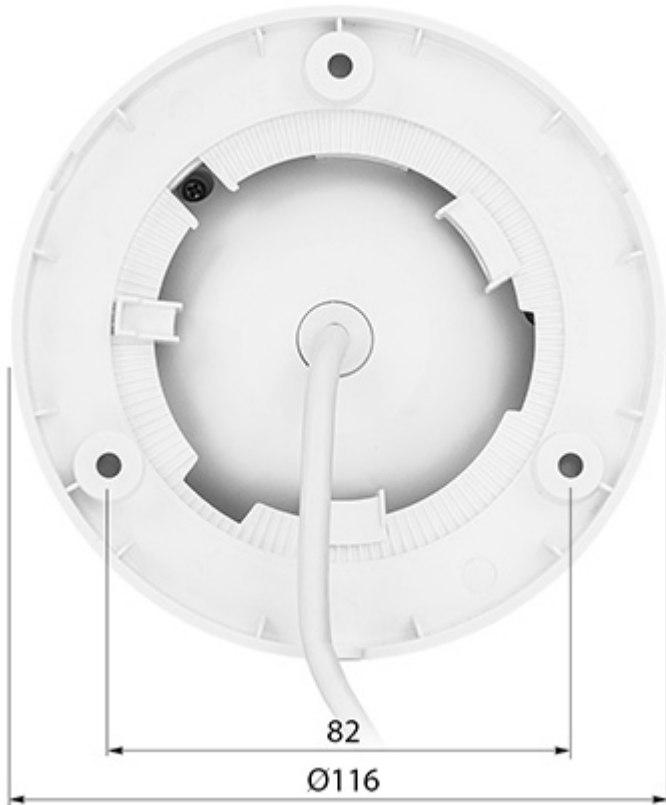

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in LED illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60