


Code: TT-9/32-FT-PREMU

# MULTISWITCH **TT-9/32-FT-PREMU** 9 INPUTS / 32 OUTPUTS PREMU TELMOR

Net: **309.16 EUR** Gross: **309.16 EUR**

PREMU TT-9/xx Multiswitches is a brand new generation of cascade and end multiswitches. Works perfectly in large-scale RTV/SAT installations and collective installations, where it is necessary to distribute RTV/SAT signal to multiple subscribers.

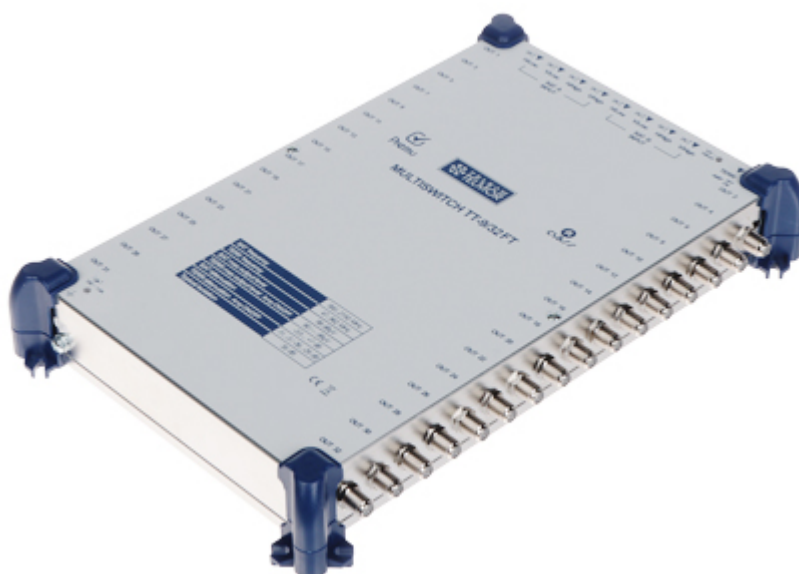

## SPECIFICATION

Inputs:	<ul style="list-style-type: none"><li>• 8x 950 MHz ... 2150 MHz,</li><li>• 1x 47 MHz ... 862 MHz</li></ul>
Outputs:	32
Switching signals:	<ul style="list-style-type: none"><li>• 13 V / 18 V,</li><li>• 0 Hz / 22 kHz,</li><li>• DiSEqC 1.0</li></ul>
SAT Tap loss:	-3.5 ... +7 dB
TV Tap loss:	<ul style="list-style-type: none"><li>• Passive : -36 ... -29 dB</li><li>• Active : -11 ... -3 dB</li></ul>
Return loss:	<ul style="list-style-type: none"><li>• TV input : 10 dB</li><li>• SAT input : 10 dB</li></ul>
Maximal output level SAT:	98 dB $\mu$ V
Maximal output level TV:	<ul style="list-style-type: none"><li>• 87 dB<math>\mu</math>V @ 47 ... 170 MHz</li><li>• 90 dB<math>\mu</math>V @ 170 ... 862 MHz</li></ul>
Isolation:	<ul style="list-style-type: none"><li>• Between inputs TV/SAT : <math>\geq</math> 30 dB</li><li>• Between inputs SAT/TV : <math>\geq</math> 45 dB</li><li>• Interpolarized H/V : 35 dB</li></ul>
Pre-amplifiers powering:	12 V DC / 150 mA
Power supply:	13 V DC / 1.5 A (power adapter included)
Dimensions:	215 x 330 x 51 mm
Weight:	1.165 kg
Manufacturer / Brand:	TELMOR
Guarantee:	2 years

## PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Top view:



Connectors:





In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------