

Code: F/ZAC-RG59/C

COMPRESSION PLUG F/ZAC-RG59/C

Net: 0.29 USD Gross: 0.29 USD

Precise thread eliminates problems with screwing the connectors on sockets. Double compression rings on the cable and the O-ring seal at connection side fully protect the cable and the installation equipment against water penetration.

Quick and easy assembly, as well as stability of operation of the equipment are really worth the price.



SPECIFICATION


Connector type:	"F" Straight plug
Attachment of connector elements:	Compression mounting
Application:	Coaxial cable
Dielectric diameter:	max. 4 mm
Impedance:	75 Ω
Wire mounting:	—
Cable diameter:	max. 7.6 mm
Shield fastening:	Compression mounting
Material:	Brass (Nickel-plated)
Watertightness:	✓
Example of application:	RG59
Main features:	<ul style="list-style-type: none">• Wide frequency range• Watertightness of connector with cable connection• Resistance to corrosion - made of non-ferrous metals and highest-quality dielectric• Very low loss in the whole operating band• Perfect matching to the transmission line within the whole operating band• Properly compressed connection is highly resistant to break• Many patent-pending solutions• To crimp use the crimping tool, HT-5082R / HTL-548B
Weight:	0.009 kg
Dimensions:	Ø 12.4 mm x 27.9 mm
Guarantee:	2 years

PRESENTATION

Correctly prepared cable for the connector F/ZAC-RG59/C:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

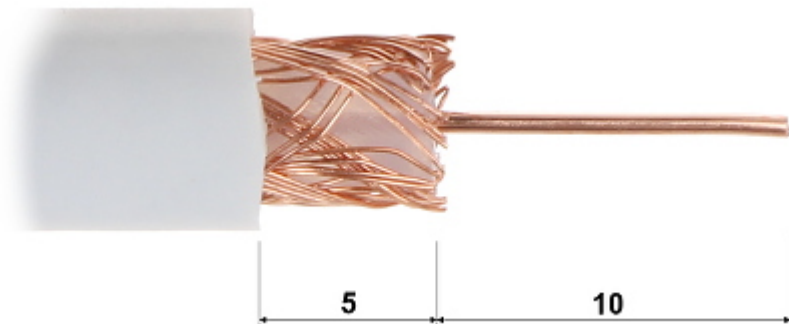

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

