

Code: IPB-5-10-S4

Switch PoE **IPB-5-10-S4** 6-PORT ATTE

Net: **64.74 EUR** Gross: **79.63 EUR**



The IPB-5-10-S4 switch was designed as a complete, integrated solution for powering small CCTV IP systems (e.g. 5 IP cameras).

PoE powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install. 5 ports support Power over Ethernet (PoE) function.

SPECIFICATION

Standards:	IEEE 802.3af, IEEE 802.3at, Passive PoE
Management via WWW / console:	—
LAN ports:	<ul style="list-style-type: none">• 1 x RJ45 10/100 Base-T - Uplink• 5 x RJ45 10/100 Base-T - PoE (802.3af/at) / Passive PoE
LED diodes:	Power, LAN
Transmission speed:	10 / 100 Mbps : 1 Port LAN + 5 LAN & PoE ports
Maximal output power:	<ul style="list-style-type: none">• 36 W @ Passive PoE - 1 ... 5 ports,• 30 W @ PoE (802.3at) - 1 ... 5 ports• 15.4 W @ PoE (802.3af) - 1 ... 5 ports
Maximal total power:	75 W
Main features:	<ul style="list-style-type: none">• Supported PoE devices: 802af/at, Passive PoE• Possibility to connecting in cascade• Efficiency : 91 % @ 75 W• 5 polymer fuses - PoE• Possibility to power other devices powered from 48 V (screw connection)• PSU thermal protection• Short-circuit protection• Overload protection• The ability to independently turn on and off the PoE power for each of the LAN 1 ... LAN 4 ports• Switch has built-in a 48 V DC power supply adapter with power of 75 W• "Index of Protection" : IP55
Power supply:	180 ... 240 V AC - Built-in switching power supply
Weight:	0.43 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Dimensions:	158 x 118 x 77 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION



Internal view of the housing:



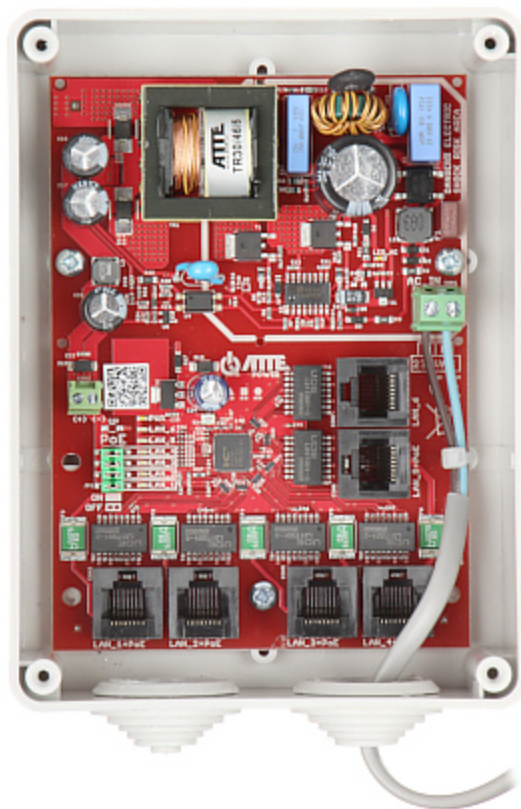

Mounting side view:



In the kit:

