

Code: DH-HAC-HDW1400EMP-A-

HD-CVI, PAL VANDALPROOF CAMERA **DH-HAC-HDW1400EMP-A-** -
3.7 Mpx 2.8 mm DAHUA
Net: 70.28 EUR Gross: 70.28 EUR

Megapixel camera with 1/3" CMOS sensor and HD-CVI (High Definition Composite Video Interface) / PAL.
The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.
Camera is according to IP67 Index of Protection norm.
Attention! In 4 Mpx resolution camera works only with DAHUA recorders supporting that resolution.



SPECIFICATION

Standard:	HD-CVI, PAL
Sensor:	1/3 " CMOS
Matrix size:	4.1 Mpx
Resolution:	2560 x 1440 - 3.7 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p , 960 x 576 - 960H, PAL
Range of IR illumination:	50 m
IR illuminator power adjustment:	Automatic
IR illuminator support:	ICR - Movable InfraRed filter
Lens:	2.8 mm
View angle:	• 100 ° (manufacturer data) • 98 ° (our tests result)
S/N ratio:	> 65 dB
Video output:	HD-CVI / PAL, 1 Vpp / 75 Ω
Audio:	Microphone built-in


Main features:	• D-WDR - Wide Dynamic Range • 2D-DNR - Digital Noise Reduction • ICR - Movable InfraRed filter • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • Motion Detection - max. 4 zones • Privacy zones - max. 8 • Mirror - Mirror image • AGC - Automatic Gain Control • Auto White Balance
OSD menu:	OSD menu available via DAHUA recorder
Power supply:	12 V DC / 340 mA
Power consumption:	≤ 4.1 W
Housing:	Dome, Metal
Vandal-proof:	✓
Color:	White
"Index of Protection":	IP67
Operation temp:	-40 °C ... 60 °C
Weight:	0.44 kg
Dimensions:	Ø 106 x 94 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Camera is out from clamping ring:



Mounting side view:

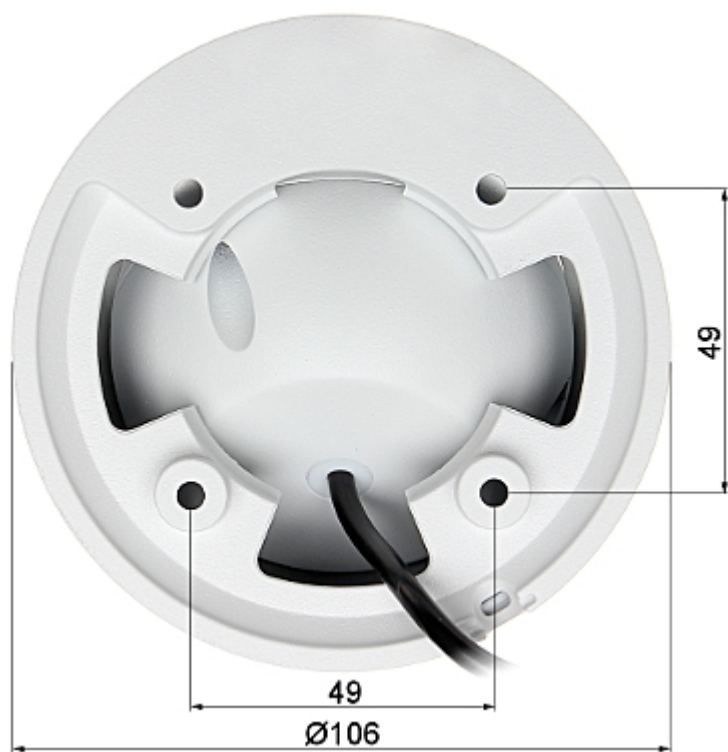

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------