

Code: DS-KD8003-IME2

VIDEO DOORPHONE **DS-KD8003-IME2** Hikvision

Net: **187.82 EUR** Gross: **187.82 EUR**

The DS-KD8003-IME2 module is the main unit of the video doorphone modular system of Hikvision brand.

The DS-KD8003-IME2 is designed to cooperation with video doorphones and panels working in HIKVISION 2-Wire standard.



SPECIFICATION

Compatibility:	HIKVISION 2-wire
Doorbell button:	1 pcs
Sensor:	2.1 Mpx CMOS
Camera resolution:	1920 x 1080 - 1080p
Camera view angle:	180 °
Image compression method:	H.264
IR illuminator:	✓
Network protocols:	TCP/IP, RTSP
Alarm inputs:	4 pcs
Relay outputs:	2 x NO/NC
Main features:	• Bidirectional communication, • Microphone built-in, • Speakers built-in, • Noise suppression and echo cancellation, • Tamper detection - removing from mounting surface, • Installation of DS-KD-xx series modules takes place in dedicated DS-KD-ACF series housings (flush-mounted housings) and DS-KD-ACW series housings (surface-mounted housings)
Power supply:	• 24 V DC - HIKVISION 2-wire • 12 V DC (power adapter not included)

Power consumption:	< 16 W @ 24 V DC < 20 W @ 12 V DC
Operation temp:	-40 °C ... 60 °C
Housing:	Metal
Color:	Black
"Index of Protection":	IP65
Weight:	0.38 kg
Dimensions:	100 x 98 x 44 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, French, Greek, Spanish, Dutch, German, Portuguese, Romanian, Serbian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	305301759
Guarantee:	3 years

PRESENTATION

Front view:




Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Connectors view:

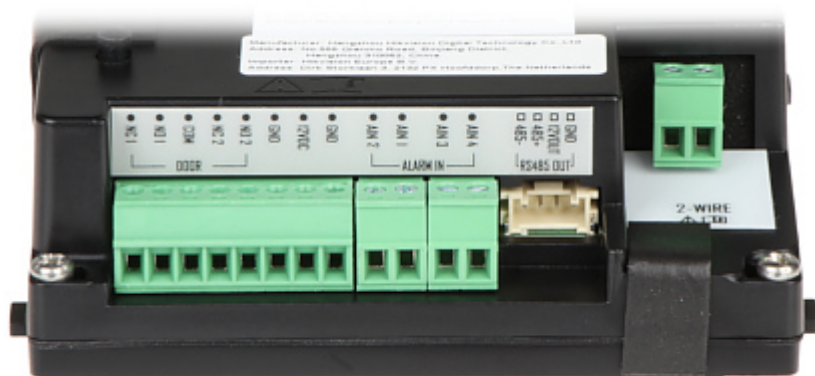


Connection schematic diagram:



1. Indoor panel
2. Video doorphone
3. Router

- 4. Power adapter
 - 5. 1-pair cable
 - 6. Twisted-pair cable
 - 7. Wi-Fi
 - 8. Power supply cable
- In the kit:

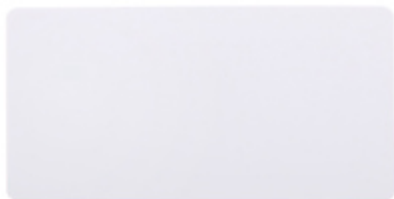

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

