

Code: CP-637

CAMERA **CP-637** STANDARD: PAL, PINHOLE 600 TVL 3.7 mm

Net: **46.55 EUR** Gross: **46.55 EUR**

Indoor micro camera equipped with very good quality Sony SuperHAD II sensor. High sensor resolution produces high detailed image. So, you can use this camera for example to persons recognition with good results. OSD menu controller is placed on the cable.



SPECIFICATION

Standard:	PAL
Sensor:	1/3 " Sony Super HAD II CCD
Resolution:	600 TVL
Lens:	3.7 mm (pinhole)
View angle:	66 °
Min. illumination:	0.001 Lux
Video output:	1 Vpp / 75 Ω
Audio:	—
Main features:	• WDR - Wide Dynamic Range • DNR - Digital Noise Reduction • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • Day/Night mode - configurable • Motion Detection max. 4 Zones • Configurable Privacy Zones max. 8 zones • Possibility to display on the image the additional parking lines
OSD menu:	✓
Housing:	Mini, Metal
Color:	Black
Application:	The camera is designed for indoor use, due to the possibility of steam condensation.
Power supply:	12 V DC / 100 mA
Operation temp:	-10 °C ... 50 °C
Weight:	0.025 kg
Dimensions:	25 x 25 x 18 mm
Guarantee:	2 years

PRESENTATION

Camera is very small:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear view:




OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at direct strong light opposite to camera:

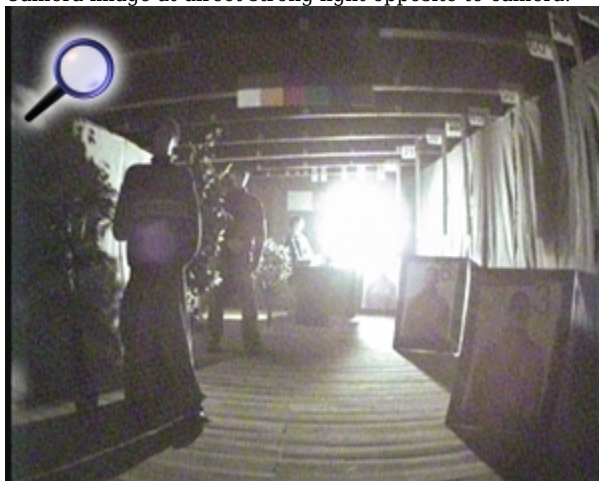

Camera image at night conditions, at different illumination values show below:

1 LUX:



0.1 LUX:



OUR OPINIONS



- Small dimensions camera.
- Extended OSD menu with many useful functions.



- Camera sensitivity parameter is lower than value declared by the manufacturer.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60