

Code: C136-2812

PAL CAMERA **C136-2812** 1000 TVL 2.8 ... 12 mm

Net: **83.17 EUR** Gross: **83.17 EUR**

The C136-2812 camera is equipped with very high resolution Sony sensor. Very high resolution of the camera sensor ensures more detailed image than standard CCTV camera. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

The camera is equipped with Mega-Pixel sensor, which using in analog camera is quite controversial.

The built-in vari-focal lens allows to set very wide range of camera view angles.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

OSD menu controller is placed on the cable. It allows to easily set or change the parameters and functions of the camera without move or unmount it.



SPECIFICATION

Matrix size:	1.3 Mpx
Standard:	PAL
Sensor:	1/3 " Sony CMOS
Resolution:	1000 TVL
Lens:	2.8 ... 12 mm
View angle:	81 ° ... 22 ° (manufacturer data) 81 ° ... 28 ° (our tests result)
Range of IR illumination:	60 m
S/N ratio:	> 50 dB
Video output:	1 Vpp / 75 Ω
Power supply:	12 V / 670 mA
Main features:	• ICR - Movable InfraRed filter • DNR - Digital Noise Reduction • Mirror - Mirror image • Motion Detection - max. 4 zones • Privacy zones - max. 8 • Sharpness - sharper image outlines • Configurable: brightness, contrast, saturation • Auto White Balance
OSD menu:	✓
Housing:	Compact, Metal
Color:	Dark graphite
"Index of Protection":	IP66
Supported languages:	English, French, Russian, Italian
Operation temp:	-10 °C ... 50 °C
Weight:	0.94 kg
Dimensions:	310 x 100 x 105 mm
Guarantee:	2 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


PRESENTATION



Side view - the lens adjustment screws are visible on the bottom:



Mounting side view:

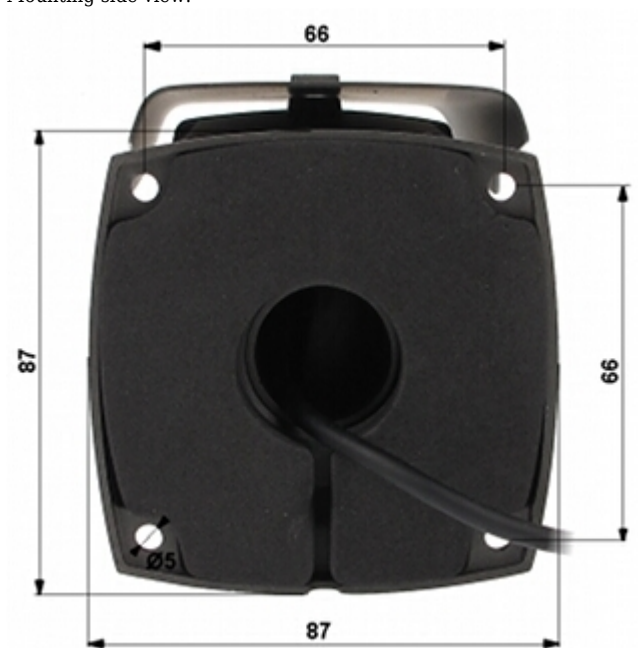

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Camera cables are hidden inside the bracket - aesthetic protection against cutting.
- The camera bracket has a regulation in all three planes.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60