

Code: APS-1412

BUFFERED SWITCHING POWER SUPPLY ADAPTER **APS-1412** SATEL

Net: **236.37 EUR** Gross: **236.37 EUR**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment. The APS-1412 has a special connector that enables cooperation with Satel devices.




SPECIFICATION

Adapter type:	Switching
Input voltage:	230 V AC
Output voltage:	12 V DC
Max. output current (total):	14 A
Power:	168 W
Battery charging current:	2 A
Protections:	• Short-circuit • Reverse polarity connection • Overload • Overvoltage
Adapter operation control:	• DC output voltage presence indication • Battery charging indication • AC input voltage presence indication • WS output - indicating AC power collapse • WB output - Low battery voltage • WP output Current overload indication
Housing type:	Plastic, DIN, TS-35 rail mounting
Weight:	1.18 kg
Dimensions:	290 x 100 x 68 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION

Front view:

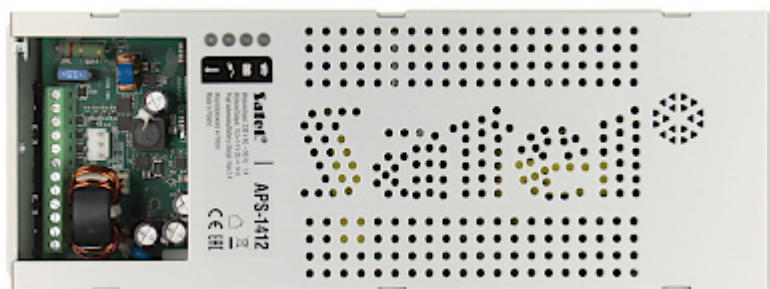

View after open the front cover:



Connectors:





In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------