



# User Manual

Code: DS-KD8002-VM  
VIDEO DOORPHONE **DS-KD8002-VM** Hikvision

## Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

**Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.**

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

### Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

Video Doorphone is mounted in a flush-mounted housing.  
The product has been equipped with a network interface, so it can be combined with systems based on the **iVMS-4200** software.



Sensor:	1.3 Mpx CMOS
Display:	3.5 " TFT LCD, 480 x 320 px
Image compression method:	H.264
LED illuminator:	✓
IR illuminator:	—
Compatibility:	Hikvision IP Video Doorphones
RS-485:	✓
Ethernet:	10/100/1000 Base-TX
UTP category:	UTP cat. 5e
Door opening sensor:	4 pcs



# User Manual

Code: DS-KD8002-VM  
VIDEO DOORPHONE **DS-KD8002-VM** Hikvision

Main features:	<ul style="list-style-type: none"><li>• 13.56 MHz S50 proximity reader built-in, 2500 indexed users,</li><li>• Wiegand interface,</li><li>• Keyboard built-in,</li><li>• LCD display,</li><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Tamper detection - removing from mounting surface,</li><li>• Tamper protections,</li><li>• Alarm inputs / outputs : 4 / 2,</li><li>• Ability to work with reed switch and signalling the door being opened too long</li><li>• Auto-uploads alarm messages to Master station or once the duress code is entered to open the door,</li><li>• Auto-uploads captured pictures to FTP or the client,</li><li>• Port USB 2.0,</li><li>• Configuration possibility from PC - iVMS-4200 application</li><li>• Default administrator password : 123456</li></ul>
Operation temp:	-40 °C ... 70 °C
Power supply:	12 V DC / 1.25 A
Power consumption:	≤ 15 W
Housing:	Aluminum
Color:	Silver / Black
Weight:	2.6 kg
Dimensions:	418 x 145 x 61 mm
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Russian
Manufacturer / Brand:	Hikvision
SAP Code:	305300152
Guarantee:	<b>3 years</b>

Front panel:




Rear view:




View after remove the cover:




Connectors view:

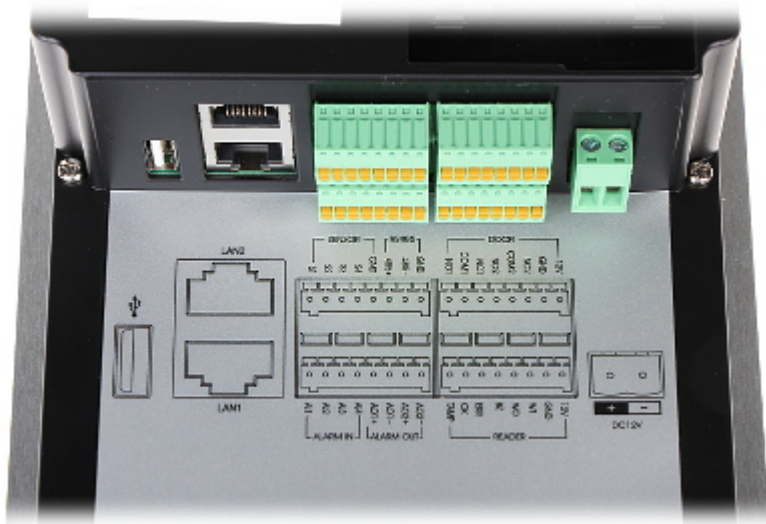

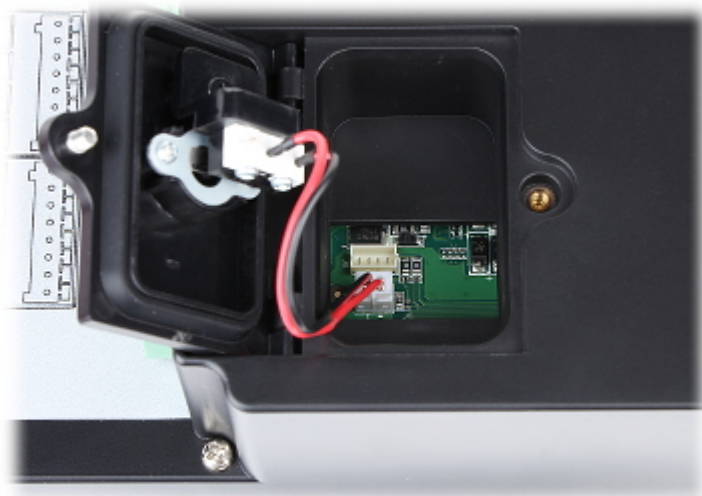

Example of application:

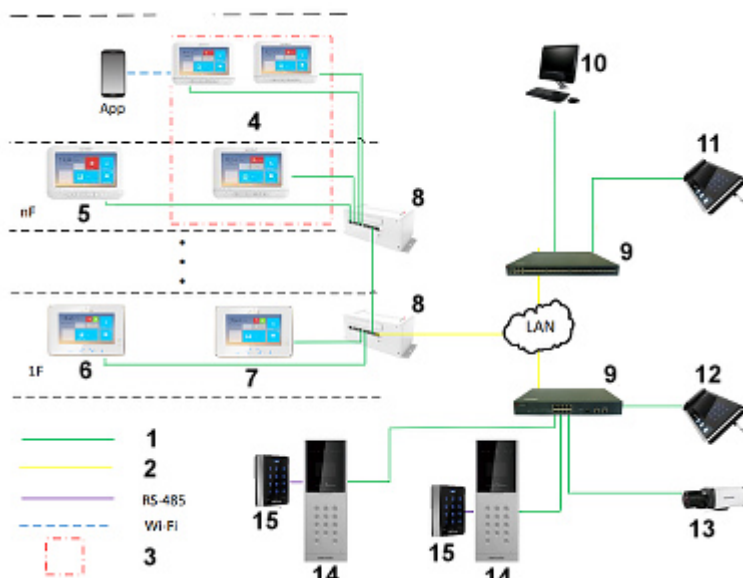

1. UTP cat. 5e/6
  2. Fiber optic
  3. Single resident
  4. Single resident panels
  5. Resident 2 panel
  6. Resident 3 panel
  7. Resident 4 panel
  8. Switch dedicated to the HIKVISION video intercom systems
  9. Switch
  10. Client software
  11. System management center
  12. System management from guarding room
  13. IP Camera
  14. DS-KD8002-VM
  15. Reader with keypad
- In the kit:



# User Manual

Code: DS-KD8002-VM  
VIDEO DOORPHONE **DS-KD8002-VM** Hikvision



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------