



# User Manual

Code: SXTG-5HPACD-SA  
ACCESS POINT WITH ANTENNA **SXTG-5HPACD-SA** MIKROTIK

## Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

**Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.**

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

### Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.



# User Manual

Code: SXTG-5HPACD-SA  
ACCESS POINT WITH ANTENNA **SXTG-5HPACD-SA** MIKROTIK

The SXTG-5HPACD-SA is an integrated solution for professional outdoor wireless networks. Thanks to a unique construction, device offers unparalleled performance in such a compact device.

The casing made of UV resistant plastic is resistant to even the most severe weather conditions. The device is compatible with MikroTik RouterOS platform.



Frequency range:	5745 MHz ... 5825 MHz
Antenna type:	13 dBi Integrated, 2Tx 2Rx MIMO
Standards:	IEEE 802.11ac, IEEE 802.11a, IEEE 802.11n
Baud rates:	866 Mbps
LAN ports:	1 x 10/100/1000 Mbps
Vertical beam width (V):	90 °
Horizontal beam width (H):	90 °
Operation modes:	Access Point, Access Point WDS, Sector Access Point, Client, WDS client, Router or Bridge - 4 The level of license MikroTik RouterOS
Protections:	Overvoltage protection
Transmitter power:	30 dBm
Memory:	128 MB RAM, 128 MB NAND
Processor:	QCA9882 720 MHz
Port USB:	2.0
Power supply PoE:	✓
Power supply:	<ul style="list-style-type: none"><li>• 15 V ... 60 V DC PoE (the set includes a power supply with 2.1/5.5mm connector and a compatible PoE power adapter)</li><li>• PoE (802.3af/at)</li></ul>

Power consumption:	12 W
Operation temp:	-30 °C ... 80 °C
Weight:	0.292 kg
Dimensions:	Ø 140 x 66 mm
Manufacturer / Brand:	MikroTik
Guarantee:	2 years

Side view:



Top view:




Mounting side view:




Device connectors:



Polar pattern for horizontal polarization (respectively horizontal and vertical plane):

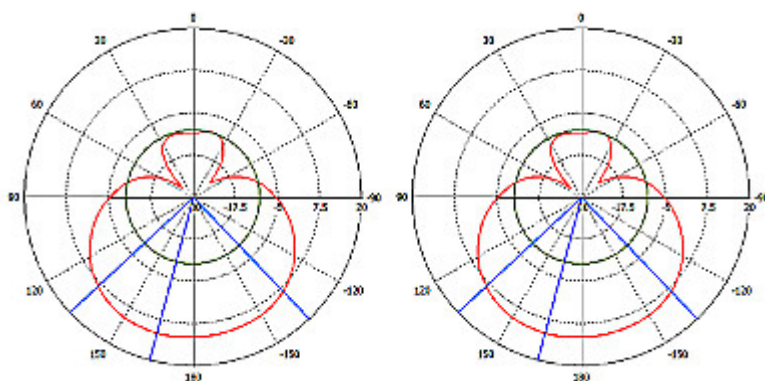

In the kit:

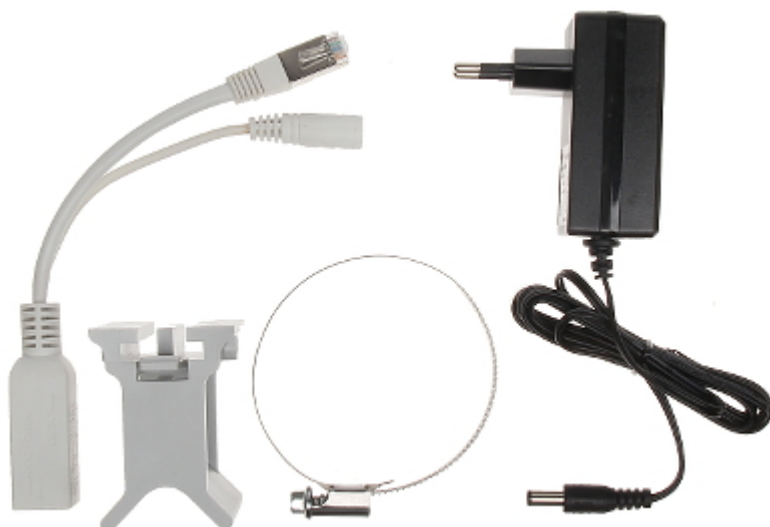



# User Manual

Code: SXTG-5HPACD-SA  
ACCESS POINT WITH ANTENNA **SXTG-5HPACD-SA** MIKROTIK

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------