

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

IP camera with "fish eye" wide-angle lens.





User Manual

Code: DS-2CD63C5G0-IVS

IP VANDALPROOF CAMERA **DS-2CD63C5G0-IVS** - 12 Mpx 1.29 mm - Fish Eye Hikvision

Standard:	TCP/IP
Sensor:	1/1.7 " Progressive Scan CMOS
Matrix size:	12 Mpx
Scanning system:	Progressive
Resolution:	4000 x 3000 - 12 Mpx , 3000 x 3000 - 9 Mpx , 2560 x 2560 - 6.5 Mpx
Lens:	1.29 mm - Fish Eye / F2.2
View angle:	180 °
Range of IR illumination:	15 m
S/N ratio:	> 50 dB
RS-485 interface:	✓
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• Microphone built-in• External microphone input• Speaker built-in• Audio output• Bi-directional audio streaming support• Audio detection
Bitrate:	32 ... 16384 kbps
Main stream frame rate:	<ul style="list-style-type: none">• 20 fps @ 12 Mpx• 25 fps @ 9 Mpx
Network interface:	10/100/1000 Base-TX (RJ-45)
Network protocols:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, IEEE 802.1x, QoS, IPv6, UDP, Bonjour
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: Free application iVMS-4500, Android: Free application Hik-Connect• iOS (iPhone): Free application iVMS-4500, iOS (iPhone): Free application Hik-Connect
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P)
Mobile client access ports:	8000
Port ONVIF:	80



User Manual

Code: DS-2CD63C5G0-IVS

IP VANDALPROOF CAMERA **DS-2CD63C5G0-IVS** - 12 Mpx 1.29 mm - Fish Eye Hikvision

RTSP URL:	<ul style="list-style-type: none">• Main stream rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization• Sub stream rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization
ONVIF:	16.12
Max. number of on-line users:	20
Main features:	<ul style="list-style-type: none">• Intelligent Image Analysis : Target Count - Statistical Reporting, crossing the line (tripwire), intrusion, detection of entry into the area / exit from the area, abandoned/missing object• Heat map - the selection in the image by corresponding colors the areas with different traffic• 3D-DNR - Digital Noise Reduction• D-WDR - Wide Dynamic Range• F-DNR (Defog) - Reduction of image noise caused by precipitation• ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its• ROI - improve the quality of selected parts of image• Anti-Flicker - The technology eliminates the tiring eyes flickering image effect• BLC - Back Light Compensation• HLC - High Light Compensation (spot)• Possibility to change the resolution, quality and bit rate• Time mark and image description• Image rotation and mirror• Configurable: brightness, contrast, saturation• Privacy zones• Motion Detection
Power supply:	<ul style="list-style-type: none">• PoE (802.3at),• 12 V DC / 1 A
Power consumption:	<ul style="list-style-type: none">• ≤ 15 W @ PoE (802.3at)• ≤ 12.5 W @ 12 V DC
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	IK10
Operation temp:	-40 °C ... 60 °C
Weight:	0.72 kg
Dimensions:	167 x 153 x 55 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	311302234
Guarantee:	3 years

Front view:



Camera view after remove the Dome cover:





Memory card slot:




Mounting side view:



Camera connectors:



Camera dimensions:

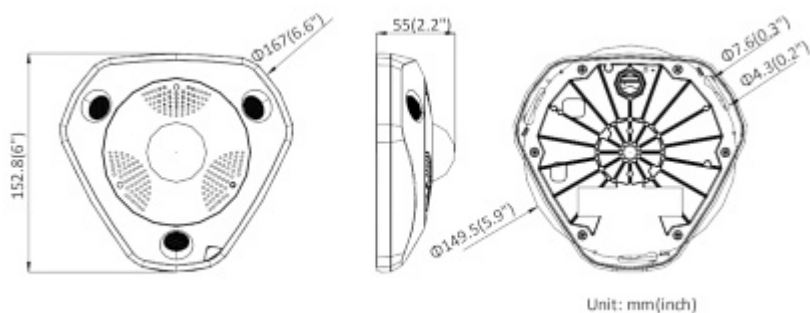

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------